

Specifications

ELECTRICAL: 120-277 VAC	DIMENSIONS: (HxWxD)	WEIGHT
• 6" Unit - 35W (start-up), 28.3W (Operation)	• 6" Unit: 9" x 9" x 10.5"	• 6" Unit: 3.5 lbs
• 9" Unit - 47W (start-up), 36.8W (Operation)	• 9" Unit: 9" x 9" x 13"	• 9" Unit: 3.70 lbs
• 14" Unit - 73W (start-up), 59.5W (Operation)	• 14" Unit: 9" x 9" x 18.5"	• 14" Unit: 4.08 lbs

Certifications UL 1995, CSA C22.2 No. 236 Electrical, UL 2998, CARB, ROHS



MAINTENANCE:

Replacement of bulb at 18 months and the NC²I cell and bulb every 3 years

WARRANTY:

5 years on the ballast and 1 year on cell and bulb

Replacement Parts:

Bulbs:

6" Bulb Part Number: CP-UVCCP-144-4HHOSPL02 1X7315

9" Bulb Part Number: CP-UVCCP-212-4HHOSPL02 1X4087


14" Bulb Part Number: CP-UVCCP-357-4HHOSPL02 1X4089

Cells(which includes 2 bulbs):

6" NC²I Cell Part Number: CASPR Medik 6 Cell 1X7313-2B

9" NC²I Cell Part Number: CASPR Medik 9 Cell 1X4203-2B

14" NC²I Cell Part Number: CASPR Medik 14 Cell 1X4204-2B

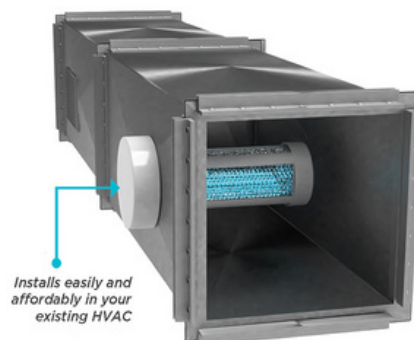

Product Contents

