

Specifications

	Transit 9-36v	Transit 120v
Weight	4.0 lbs	4.0 lbs
Dimensions (WxLxH)	9"x10"x2.6" 11"x12"x2.6" (with mount)	9"x10"x2.6" 11"x12"x2.6" (with mount)
Electrical Input	9-36vdc 1.5A	100-240VAC 50/60Hz 1.8A 277VAC 50/60Hz 0.9A
Amp Draw	.57A (12v) .65A (24v)	.02A (120v)
Air flow (CFM)	17.9	17.9
Noise (dba)	48	48
Min/ Max Operating Temp	14°- 140°F	14°- 140°F

** Available in a top and bottom mount

Certifications UL 507, CA-2243755-0 Electrical, UL 2998, CARB, ROHS

MAINTENANCE:

Replacement of cell and bulb at 18 -24 months

WARRANTY:

3 years on the ballast and 1 year on cell and bulb

Replacement Parts:



NC2I Cell: NC2I Cell (Ozone-Free) Item #CELL-HV-5-001-AP-TR

Filter: #CA450769011



Product Contents

Unit Front

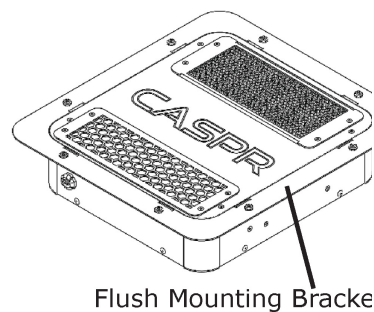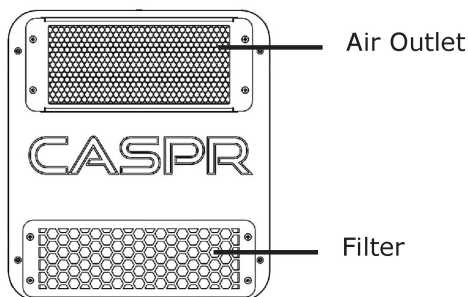

Unit Internals

